


RS8110

Non-Programmable Thermostat
Single Stage – 1 Heat / 1 Cool

Robertshaw®

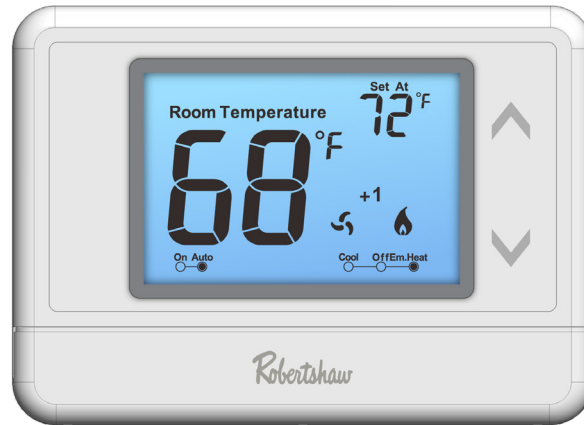

Description

Contractors can offer owners easy, yet powerful and reliable single-stage heating and cooling control in a simple, modern design with the RS8110 non-programmable wall thermostat.

Features and Benefits

- Quick, easy installation
- Modern, user-friendly design and operation
- Large, easy-to-read 6.5-square-inch blue backlit display
- Adjustable heat and cool setpoint limits
- Simplify installation with push-in terminals
- Secure your device with a keypad lock feature

Specifications

Dimensions (W x H x D)	5.3 x 3.8 x 1 in. (136 x 98 x 26 mm)
Mounting	Wall or junction box
System compatibility	Single-stage heating and cooling
System fuel source	Gas, electric or oil
Heat pump compatibility	Systems without auxiliary or emergency heat
Millivolt application compatibility	Yes
Temperature range	41°F to 95°F (5°C to 35°C)
Control temperature range	44°F to 90°F (7°C to 32°C)
Display accuracy	±1°C (at 20°C) / ±1°F (at 68°F)
Power sources	24V AC (18 to 30V AC), 50/60 Hz for hardwire (common wire required) or 2 AA 1.5V alkaline batteries (included)
Terminals	Rh, Rc, C, Y, W, G, O, B

6 Year
Limited
Warranty

Robertshaw
RANCO • PARAGON • CASTFUTURA

Customer Service
+1 800 304 6563
HVACCustomerService
@robertshaw.com

www.robertshaw.com
©2026 Robertshaw
02/26 150-2795 RevC

Replacement and Cross Reference

RS8110

Pro1®	T601-2, T701
Honeywell	TH5110D1022, TH3110U2008, TH1110U4000/U
Braeburn®	1020, 1000NC, 1020NC, 1030
Emerson™ White-Rodgers™	1F83C-11NP, 1F75C-11NP, 1F86-0244, 1F86-344
Aprilaire®	8444

Optional Accessories

Wall Plate RS9010-2

- Designed to cover up wall imperfections left by previous thermostats
- Bright white design provides a secure and stylish mounting solution for any decor
- Multiple mounting holes for flexible installation
- Compatible with all Pro-Series thermostats
- 6.3" wide x 5.1" tall
- 1 year limited warranty
- Order part number RS9010-2

