


RS9110T

Programmable Thermostat
Single Stage – 1 Heat / 1 Cool

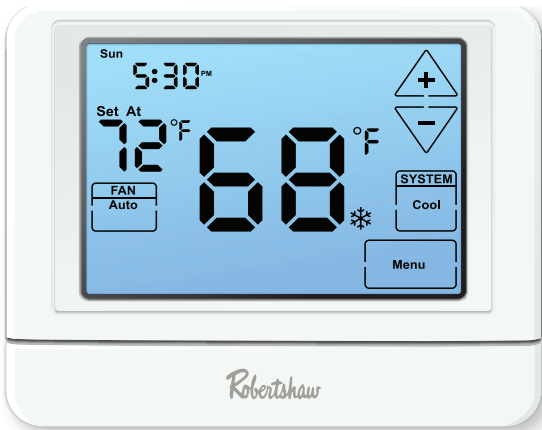

Description

Contractors can offer owners easy, yet powerful and reliable single-stage heating and cooling control in a simple, modern design with the RS9110T programmable wall thermostat.

Features and Benefits

- Quick, easy installation
- Modern, user-friendly design and operation
- 7-day, 5-1-1 or non-programmable
- Large 8.8-square-inch blue backlit touchscreen display
- Auto changeover
- Adjustable temperature differential (swing)

Specifications

Dimensions (W x H x D)	4.7 x 3.8 x 1 in. (119.6 x 97.6 x 26 mm)
Mounting	Wall or junction box
System compatibility	Single-stage heating and cooling
System fuel source	Gas, electric or oil
Heat pump compatibility	Systems without auxiliary or emergency heat
Millivolt application compatibility	Yes
Temperature range	32°F to 99°F (1°C to 40°C)
Control temperature range	41°F to 90°F (5°C to 32°C)
Display accuracy	±1°C (at 20°C) / ±1°F (at 68°F)
Power sources	24V AC (18 to 30V AC), 50/60 Hz for hardwire (common wire required) or 2 AAA 1.5V alkaline batteries (included)
Terminals	Rh, Rc, C, Y, W, G, O, B

6 Year
Limited
Warranty



Customer Service
+1 800 304 6563
HVACCustomerService@robertshaw.com

Technical Service
+1 800 445 8299
TechnicalService@robertshaw.com

www.robertshaw.com
©2024 Robertshaw
05/24 150-2800 RevB

Replacement and Cross Reference

RS9110T	
Pro1°	T805
Honeywell	TH6110D1021, TH7220U1035, TH6220U2000, TH6210U2001, TH6220D1002, TH6220D1028
Braeburn°	6100
Emerson™ White-Rodgers™	1F85U-22PR
Aprilaire°	8463

