


RS9320T

Programmable Thermostat
Multi-Stage – 3 Heat / 2 Cool

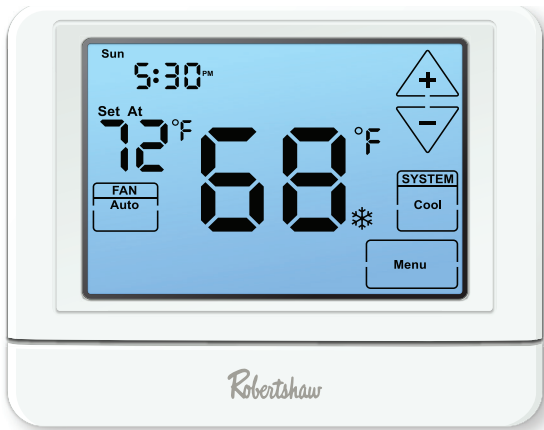

Description

Contractors can offer owners easy, yet powerful and reliable multi-stage temperature control in a simple, modern design with the RS9320T programmable wall thermostat.

Features and Benefits

- Quick, easy installation
- Modern, user-friendly design and operation
- 7-day, 5-1-1 or non-programmable
- Large 8.8-square-inch blue backlit touchscreen display

Specifications

Dimensions (W x H x D)	4.7 x 3.8 x 1 in. (119.6 x 97.6 x 26 mm)
Mounting	Wall or junction box
System compatibility	Two-stage conventional heating and cooling or three-stage heating and two-stage cooling with heat pump
System fuel source	Gas, electric or oil
Heat pump compatibility	Systems with or without auxiliary or emergency heat
Millivolt application compatibility	Yes
Temperature range	32°F to 99°F (0°C to 40°C)
Control temperature range	41°F to 90°F (5°C to 32°C)
Display accuracy	±1°C (at 20°C) / ±1°F (at 68°F)
Power sources	24V AC (18 to 30V AC), 50/60 Hz for hardwire (common wire required) or 2 AAA 1.5V alkaline batteries (included)
Terminals	Rh, Rc, C, Y, Y2, W/E, W2, G, O, B

6 Year
Limited
Warranty



Customer Service
+1 800 304 6563
HVACCustomerService@robertshaw.com

Technical Service
+1 800 445 8299
TechnicalService@robertshaw.com

www.robertshaw.com
©2024 Robertshaw
05/24 150-2801 RevB

Replacement Information

RS9320T	
Pro1®	T955
Honeywell	TH8320U1008, TH7220U1035
Braeburn®	3220, 5220
Emerson™ White-Rodgers™	1F95-1291

