


RS10420T

Programmable WiFi Thermostat
Multi-Stage – 4 Heat / 2 Cool



6 Year
Limited
Warranty

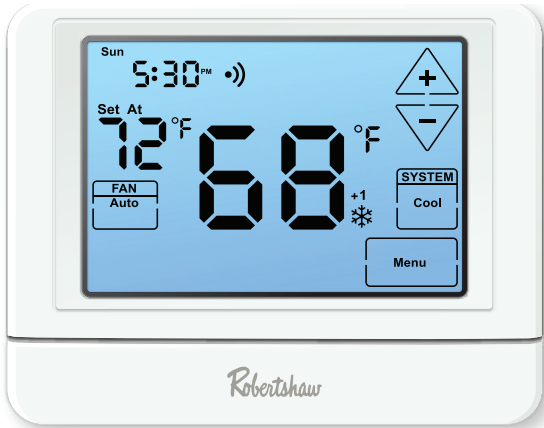

Customer Service
+1 800 304 6563
HVACCustomerService
@robertshaw.com

Technical Service
+1 800 445 8299
TechnicalService
@robertshaw.com

www.robertshaw.com
©2024 Robertshaw
05/24 150-2802 RevB

Description

Contractors can offer owners easy, yet powerful and reliable multi-stage temperature control in a simple, modern design with the RS10420T programmable wall thermostat.

Features and Benefits

- 7-day programmable
- Large 8.8-square-inch blue backlit touchscreen display
- Auto changeover
- WiFi- / smartphone-accessible using Robertshaw app for iOS or Android
- Alexa-compatible
- C-wire Required

Specifications

Dimensions (W x H x D)	4.7 x 3.8 x 1 in. (119.6 x 97.6 x 26 mm)
Mounting	Wall or junction box
System compatibility	Two-stage conventional heating and cooling or four-stage heating and two-stage cooling with heat pump
System fuel source	Gas, electric or oil
Heat pump compatibility	Systems with or without auxiliary or emergency heat
Millivolt application compatibility	No
Temperature range	32°F to 99°F (0°C to 40°C)
Control temperature range	41°F to 90°F (5°C to 32°C)
Display accuracy	±1°C (at 20°C) / ±1°F (at 68°F)
Power source	24V AC (18 to 30V AC), 50/60 Hz for hardwire (common wire required)

Replacement and Cross Reference

RS10420T

Pro1®	T855I, 701i
Honeywell	TH6320WF1005, TH8320WF1029/U, TH8732WFH5002/U, TH6220WF2006, TH6320WF2003, TH8321WF1001, TH9320WF5003
Braeburn®	7320, 7305, 7300, 6300, 5325
Emerson™ White-Rodgers™	1F87U-42WF
Aprilaire®	8910W

