

Robertshaw

Pro-Series



RS8110



RS8210, RS9110,
RS9210, RS9220



RS9423T



RS10420T, RS10421T

6 Year
Limited
Warranty



VALUABLE FEATURES, VARYING BY MODEL

- Touchscreen display
- Intuitive wake/leave/return/sleep programming icons
- On/off filter change reminder
- Auto changeover
- Smartphone accessibility via Robertshaw app (iOS/Android)
- Alexa compatibility
- Wireless outdoor sensor (RS9423T or RS10421T compatible)

Wireless Outdoor
Sensor RS9055OUT



OFFER SIMPLE, POWERFUL COMMAND—FAST

A wide spectrum of control

This line of non-programmable, programmable and WiFi models suits nearly any single- or multi-stage heating and cooling system.

User-friendly design

Large, easy-to-read blue backlit displays and simple programming menus make these units easy to navigate and operate. Adjustable temperature differential (swing) and other functions put owners in control.

Easy installation

With features such as universal sub-bases, these units install quickly and give owners comfort control in no time.

Robertshaw

RANCO • PARAGON • CASTFUTURA

Customer Service +1.800.304.6563
HVACCustomerService@robertshaw.com
robertshaw.com


©2025 Robertshaw
09/25 -150-2808 D

Robertshaw

Pro-Series

WALL THERMOSTATS

INNOVATION DRIVES EVERYTHING WE DO

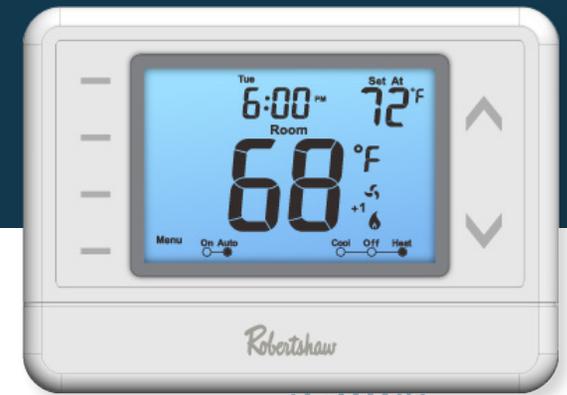

RS9110

FEATURE-RICH MODELS OFFER UNIQUE VALUE

robertshaw.com



Pro-Series

FIND THE RIGHT MODEL FOR YOUR PROJECT

MODEL FEATURES	RS8110	RS8210	RS9110	RS9210	RS9220	RS9423T	RS10420T	RS10421T
Non-programmable	•	•	•	•	•	•	•	•
Programmable 5-1-1 or 7-day			•	•	•	•	•	•
Heating stages	1	2	1	2	2	4*	4*	4*
Cooling stages	1	1	1	1	2	2*	2*	2*
Suits heat pump – no aux/emergency heat	•	•	•	•	•	•	•	•
Suits heat pump with aux/emergency heat		•		•		•	•	•
Dual fuel compatibility (with outdoor remote sensor)						•		•
Humidity/dehumidification/ventilation control								•
System fuel source: Gas, Electric or Oil	•	•	•	•	•	•	•	•
Suits millivolt applications	•	•	•	•	•	•		
Wall or junction box mount	•	•	•	•	•	•	•	•
Touchscreen display						•	•	•
Keypad lockout	•	•	•	•	•	•	•	•
Adjustable differential (swing) control	•	•	•	•	•	•	•	•
Auto changeover						•	•	•
Adjustable temperature calibration	•	•	•	•	•	•	•	•
Adjustable setpoint limits	•	•	•	•	•	•	•	•
Minimum compressor run time		•	•	•	•	•	•	•
Compressor delay—short-cycling prevention	•	•	•	•	•	•	•	•
Filter change reminder		•	•	•	•	•	•	•
WiFi/smart phone accessible							•	•
24V Hardwire (C Terminal)	•	•	•	•	•	•	•	•
DC 2 x AA 1.5V Alkaline batteries (included)	•	•	•	•	•	•		
TERMINALS	Rh, Rc, C, Y, W, G, O, B	R, C, Y, W2, W/E, G, O, B	Rh, Rc, C, Y, W, G, O, B	R, C, Y, W2, W/E, G, O, B	Rh, Rc, C, Y, Y2, W, W2, G, O, B	Rh, Rc, C, Y, Y2, W/E, W2, G, O, B	Rh, Rc, C, Y, Y2, W/E, W2, G, O, B	Rh, Rc, C, Y, Y2, W/E, W2, G, O, B, D, H